




# hollingsworth

## THE HW 10X10 CONSERVATORY COLLECTION

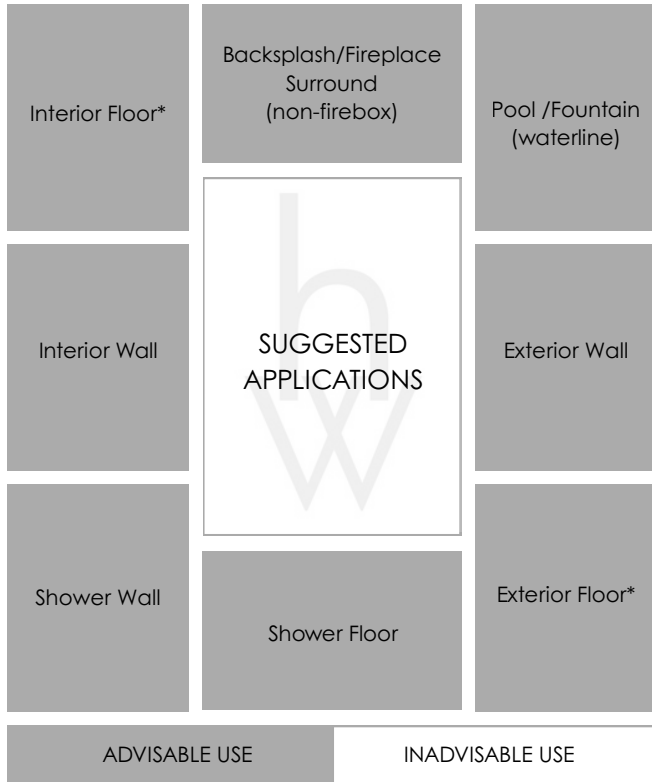

\*(Indicated for low-traffic use) - Not tested for slippage\*

### APPLICATION NOTES


All finishes are suitable for use in wet environments, including steam showers, provided they are properly installed, sealed, and maintained.

### INSTALLATION/MAINTENANCE

#### **HW Tile assumes no responsibility for installation**

- Installation constitutes acceptance of the product.
- Tile should be installed by a licensed and experienced professional tile setter.
- Installation should adhere to the standards outlined by the Tile Council of North America (TCNA) or the American National Standards Institute (ANSI).
- All tile must be inspected PRIOR to installation.
- Dry-lay tile before installation to ensure proper color blending and uniformity.
- Tile must be sealed before grouting to prevent dark grout from staining crackle finishes.
- Hollingsworth recommends a grouted test panel to evaluate the final appearance of grouted materials prior to installation.
- After installation, tile and grout should be re-sealed and regularly maintained.

### VARIATION LEVEL

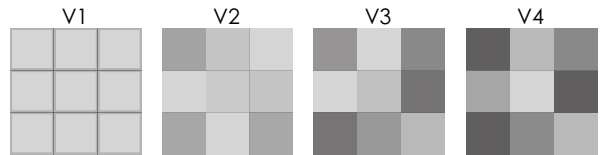

#### **This collection is V4**

1. Minimal Variation - Uniform color with little to no difference.
2. Slight Variation - Minor, subtle color differences expected.
3. Moderate Variation - Noticeable range of light and dark tones.
4. High Variation - Wide range of tones from light to dark.

### PRODUCT VARIATION

Color, size, and surface variations are inherent characteristics of our handmade tile and natural stone. Minor variations contribute to its unique appeal. Please refer to our color variation chart for guidance, or contact us for additional details.

### THE 10X10 CONSERVATORY DETAILS

#### MATERIAL

Textured Stone-look Porcelain

#### FINISH

Matte

#### AVAILABLE SIZE

10" x 10"  
(9.75 x 9.75)

#### COLORS

Calacatta Viola Matte, Nero Matte, Travertine Matte, Calacatta Matte, Pietra Grey Matte, White Carrara Matte, Sand, Pebble, Fossil, Graphite, Smoke

### TILE THICKNESS

3/8"  
Sizes are nominal\*

### GROUT SPACING

1/16" to 1/8"