




hollingsworth

THE HW PERFECT WHITE COLLECTION

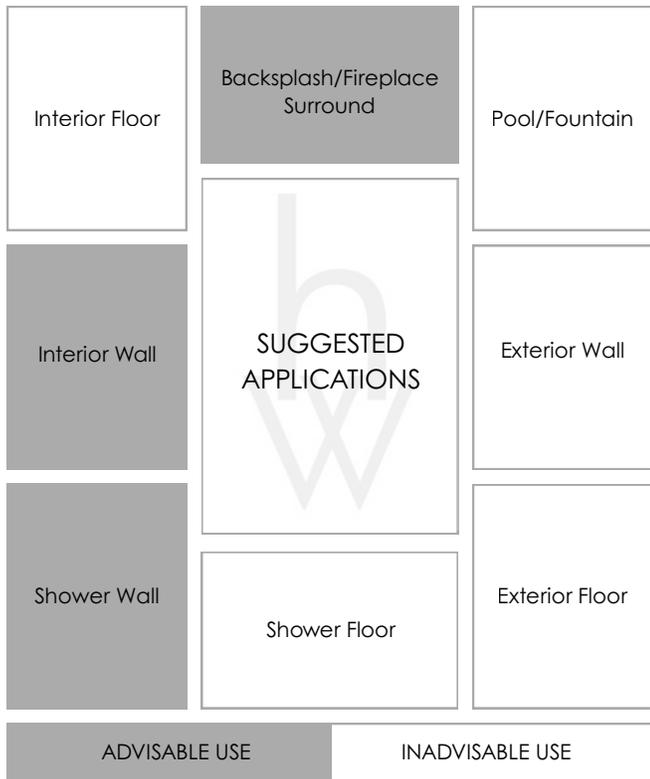

APPLICATION NOTES


All finishes are suitable for use in wet environments, including steam showers, provided they are properly installed, sealed, and maintained.

INSTALLATION/MAINTENANCE

HW Tile assumes no responsibility for installation

- Installation constitutes acceptance of the product.
- Tile should be installed by a licensed and experienced professional tile setter.
- Installation should adhere to the standards outlined by the Tile Council of North America (TCNA) or the American National Standards Institute (ANSI).
- All tile must be inspected PRIOR to installation.
- Dry-lay tile before installation to ensure proper color blending and uniformity.
- Tile must be sealed before grouting to prevent dark grout from staining crackle finishes.
- HW Tile recommends a grouted test panel to evaluate the final appearance of grouted materials prior to installation.
- After installation, tile and grout should be re-sealed and regularly maintained.

VARIATION LEVEL

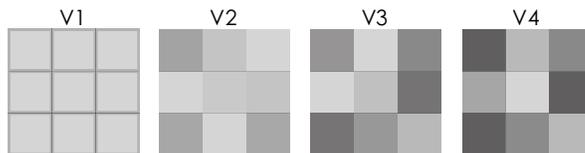

This collection is V1


1. Minimal Variation - Uniform color with little to no difference.

Size and surface variations are inherent characteristics of our handmade tile and natural stone. Minor variations contribute to its unique appeal.


THE PERFECT WHITE DETAILS

HW Tile Signature Collection - White Body Ceramic Tile

AVAILABLE SIZES

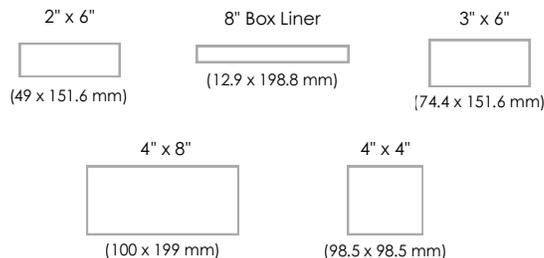

Coordinating tiles are designed for modular patterns and require a 2 mm grout joint for compatibility. The 4x4 and 4x8 formats align on the 8" side. Refer to the illustration below in millimeters.

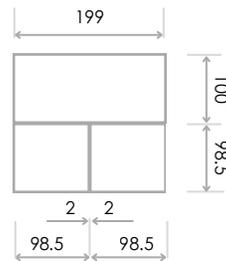

TILE THICKNESS

12 mm
Sizes are nominal*

GROUT SPACING

1.5 to 2 mm